

DINGLI

JCPT1412DC

SELF PROPELLED SCISSOR LIFT - ELECTRIC






Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

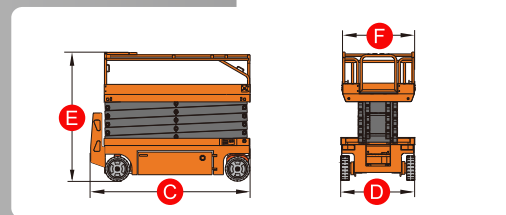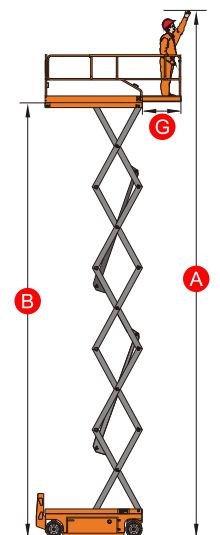


Swing Out Tray



Emergency Lowering System



Extended Platform



Flashing Beacon

DINGLI

JCPT1412DC

SELF PROPELLED SCISSOR LIFT - ELECTRIC



JCPT1412DC JCPT1612DCS JCPT1612DCB JCPT1614DC

	S.W.L(CE)	320kg	250kg	250kg	/
	S.W.L(ANSI)	250kg	/	/	227kg
	S.W.L On Extension	113kg	113kg	113kg	113kg
	Max.Occupants	3	2	2	2
	A Max.Working Height	13.80m	15.70m	15.70m	15.70m
	B Max.Platform Floor Height	11.80m	13.70m	13.70m	13.70m
	C Overall Length	2.48m	2.48m	2.84m	2.84m
	D Overall Width	1.19m	1.19m	1.25m	1.39m
	Overall Height(Rails Up)	2.62m	2.75m	2.62m	2.62m
	E Overall Height(Rails Down)	2.09m	2.22m	2.09m	2.09m
	Platform Size(Length/Width F)	2.27m×1.12m	2.27m×1.12m	2.64m×1.12m	2.64m×1.12m
	G Platform Extension Size	0.90m	0.90m	0.90m	0.90m
	Ground Clearance(Stowed)	0.10m	0.10m	0.10m	0.10m
	Ground Clearance(Raised)	0.019m	0.019m	0.019m	0.019m
	Wheelbase	1.87m	1.87m	2.22m	2.22m
	Turning Radius(Inside/Outside)	0m/2.20m	0m/2.20m	0m/2.65m	0m/2.70m
	Drive Motor	24V/1.5kW	24V/1.5kW	24V/1.5kW	24V/1.5kW
	Lifting Motor	24V/4.5kW	24V/4.5kW	24V/4.5kW	24V/4.5kW
	Travel Speed(Stowed)	4.0km/h	4.0km/h	4.0km/h	4.0km/h
	Travel Speed(Raised)	0.8km/h	0.8km/h	0.8km/h	0.8km/h
	Up/Down Speed	55/38sec	73/60sec	73/60sec	88/60sec
	Gradeability	25%	25%	25%	25%
	Max.Working Slope(CE)	1.5°/3°	1.5°/3°	1.5°/3°	/
	Max.Working Slope(ANSI)	2°/3°	/	/	2°/3°
	Batteries	4×12V/300Ah	4×12V/300Ah	4×12V/300Ah	4×12V/300Ah
	Integrated Charger	24V/25A	24V/25A	24V/25A	24V/25A
	Tyres	Φ381×127mm	Φ381×127mm	Φ381×127mm	Φ381×127mm
	Weight(CE)	2880kg	3180kg	3330kg	/
	Weight(ANSI)	3100kg	/	/	3320kg



Folding Guardrails



Safety Bracket



Compact Turning Radius



Gradeability



Delivering Safety & Productivity

Chennai | Bengaluru | Mumbai | Ahmedabad | Delhi | Kolkata | Sri Lanka | Qatar

equipment@mtandt.com | 90901 01065 | www.mtandt.com